

## Automatic screen printing press **New Facelift Version 2**

Now print on hoodies & a lot more with  
the all new standard pallets!



Tagless Neck Label



Other Specialty Items




High Density Labels & Logos



Pocket/shoulder Logos



Swimming Cap

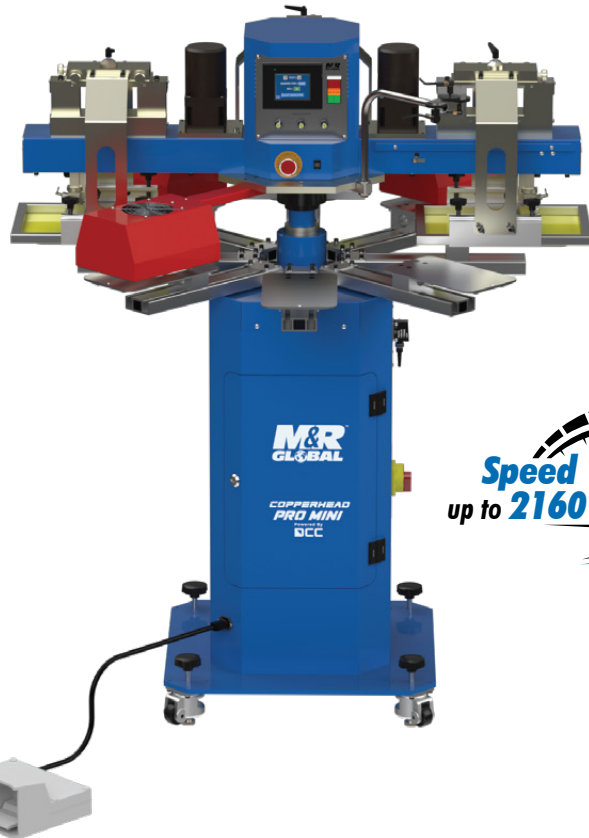

M&R Global's Copperhead Pro Mini™ is an extremely versatile, compact, all-electric automatic screen printing press. The Pro Mini requires just a small amount of electrical power to operate, and does not require any compressed air for operation.


The Pro Mini's design enables extremely high production speeds for maximum efficiency with a wide variety of promotional products. Neck labels and other specialty print requirements are ideally suited for the Pro Mini.

With its combination of efficiency, speed, and ease of use, the Copperhead Pro Mini from M&R Global provides huge value and productivity in an amazingly compact and portable package.

## FEATURES

- Print Speeds in Excess of 2,400/Hour
- All-Electric Operation
- Compact Footprint, Mobile, with Sturdy Construction
- Maximum Image Area: 15 x 15 cm (6" x 6")
- Standard Pallet Size: 11 x 23 cm (4.3" x 9")
- Available in 8- and 10-Station Configurations
- Laser Registration Guide
- Print Stack Mode Enables HD and Other Specialty Print Techniques

## Fully-electrical/mechanical design requires no compressed air for operation

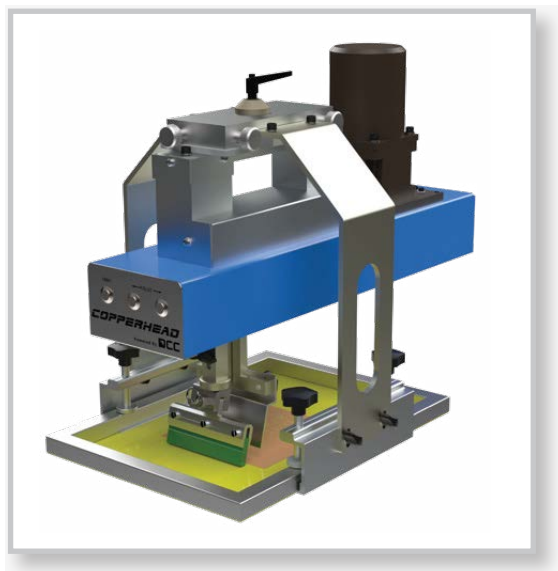

| SPECIFICATIONS                       | PRO MINI 8/1                                                                                    | PRO MINI 8/2                                                                                        | PRO MINI 8/3                                                                                | PRO MINI 10/4                                   |
|--------------------------------------|-------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------|-------------------------------------------------|
| Electrical Requirements <sup>1</sup> | 208-230 V, 1 ph, 27 A,<br>50/60 Hz, 4.8 kW (UL)<br>208-230 V, 1 ph, 27 A,<br>50 Hz, 4.8 kW (CE) | 208-230 V, 1 ph, 27.5 A,<br>50/60 Hz, 4.9 kW (UL)<br>208-230 V, 1 ph, 27.5 A,<br>50 Hz, 4.9 kW (CE) | 208-230 V, 1 ph, 28 A,<br>50/60 Hz, 5 kW (UL)<br>208-230 V, 1 ph, 28 A,<br>50 Hz, 5 kW (CE) | 208-230 V, 1 ph, 36 A,<br>50/60 Hz, 6.6 kW (CE) |
| In-built Flash Cure Units            | 3                                                                                               | 3                                                                                                   | 3                                                                                           | 4                                               |
| Diameter                             | 131 cm (51.6")                                                                                  | 131 cm (51.6")                                                                                      | 131 cm (51.6")                                                                              | 145 cm (57")                                    |
| Maximum Frame Size                   | 28 x 38 cm (11" x 15")                                                                          | 28 x 38 cm (11" x 15")                                                                              | 28 x 38 cm (11" x 15")                                                                      | 28 x 38 cm (11" x 15")                          |
| Maximum Image Area                   | 15 x 15 cm (6" x 6")                                                                            | 15 x 15 cm (6" x 6")                                                                                | 15 x 15 cm (6" x 6")                                                                        | 15 x 15 cm (6" x 6")                            |
| Standard Pallet Size                 | 11 x 23 cm (4.3" x 9")                                                                          | 11 x 23 cm (4.3" x 9")                                                                              | 11 x 23 cm (4.3" x 9")                                                                      | 11 x 23 cm (4.3" x 9")                          |
| Machine Weight                       | 262 kg (578 lb)                                                                                 | 294 kg (648 lb)                                                                                     | 326 kg (719 lb)                                                                             | 400 kg (882 lb)                                 |
| Stations/Colors                      | 8/1                                                                                             | 8/2                                                                                                 | 8/3                                                                                         | 10/4                                            |

<sup>1</sup> Use uninterruptible power supply (UPS) to safeguard machine from voltage fluctuation out of main supply. If incoming voltage differs from the voltage(s) listed in the brochure, calculate amperage accordingly